


HOOKS

Series hooks conform to API Spec. 8A , Spec.8C and industry standard SY/T5527,and are granted the right to use API monogram.

TECHNICAL FEATURES

- Special structure in main body with good hydraulic buffer function;
- The main hook is equipped with double safety device;
- The main parts of hooks are made of high-strength alloy steel, and passed on non-destructive

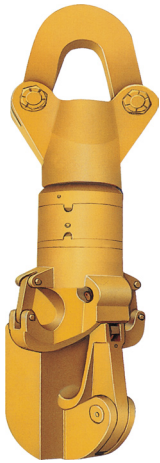

TECHNICAL PARAMETERS

Model	DG-50	DG-100	DG-135	DG-225	DG-315	DG-450	DG675	DG900
Max. Load, kN (1bs)	500 (110000)	1000 (300000)	1350 (37400)	2250 (500000)	3150 (700000)	4500 (1000000)	6750 (1500000)	9000 (2000000)
Spring travel ,mm	140	140	150	180	200	200	200	250
Opening size of hook, mm	130	140	165	190	220	220	235	305
Overall dimensions (L x W x H),mm	1660 × 522 × 500	1900 × 765 × 700	1997 × 700 × 730	2548 × 780 × 750	2960 × 890 × 835	2960 × 890 × 880	3730 × 1210 × 930	4150 × 1315 × 1110
Weight, kg	419	1310	1685	2175	3430	3520	7300	10350