


TRAVELING BLOCKS

Series traveling blocks conform to API Spec. 8A , Spec.8C and industry standard SY/T5527,and are granted the right to use API monogram.

TECHNICAL FEATURES

- Sheave grooves are heat hardened to provide good abrasion resistance and long service life.
- Sheaves and bearings are interchangeable with its matched crown block sheaves and bearings.

TECHNICAL PARAMETERS

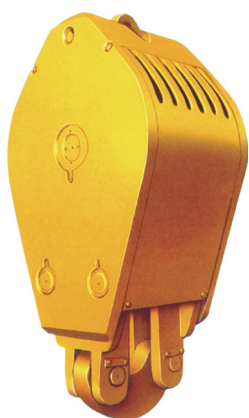

TECHNICAL PARAMETERS

Model	YC50	YC135	YC170	YC225	YC315	YC450	YC585	YC675	YC900	
Max. Load, kN(1bs)	500 (110000)	1350 (300000)	1700 (374000)	2250 (500000)	3150 (700000)	4500 (1000000)	5850 (1300000)	6750 (1500000)	9000 (2000000)	
Drilling line size,mm(in)	24 (15/16)	29 (1 1/8)	29 (1 1/8)	32 (1 1/4)	35 (1 3/8)	38 (1 1/2)	38 (1 1/2)	45 (1 3/4)	48 (1 7/8)	
Number of sheaves	4	4	5	5	6	6	6	7	7	
Pulley diameter, mm	500	762	1005	1120	1270	1524	1524	1524	1829	
Overall Dimensions	Length , mm,(in)	953 (37 1/2)	1353 (53 1/4)	2020 (83 5/8)	2294 (90 5/16)	2690 (106)	3110 (122 1/2)	3132 (123 1/3)	3410 (134 1/3)	3850 (151 3/5)
	Width, mm(in)	552 (21 5/8)	595 (23 7/16)	1060 (41 1/8)	1190 (46 7/8)	1350 (53 1/8)	1600 (63)	1600 (63)	1600 (63)	1905 (75)
	Height, mm,(in)	620 (24 3/8)	840 (33)	620 (33)	630 (24 3/4)	800 (31 1/2)	840 (33)	840 (33)	1150 (45)	1235 (48 3/5)
Weight, kg(1bs)	532 (1173)	1761 (3882)	2410 (4559)	3788 (8351)	5500 (12990)	8300 (19269)	8556 (18863)	10806 (23823)	16625 (36650)	